

EXPERIMENTAL INVESTIGATION OF REINFORCED CONCRETE BEAM WITH OPENING FOR COMBINED BENDING AND SHEAR

(Review)

¹Rakesh Vijay Patil, ²Guide - Dr Bhushan shinde

¹Post Graduate Student, Department of Civil Engineering, G.H. Rasoni School of Engineering And Technology, Amravati.

²Assistant Professor, Department of Civil Engineering, G.H. Rasoni School of Engineering And Technology, Amravati.

ABSTRACT: *In the modern method of construction of building, pipes and ducts for services like water supply, sewage, air conditioning, electricity, telephone and computer networks are to be placed in appropriate positions. Usually, these pipes and ducts are connected and kept below the beam soffit and for aesthetic purpose these are covered by false ceiling thus introducing the dead space. This research aims at providing transverse openings in the beam so that the utility pipes and service ducts can be passed through the opening which may result in systematic accommodation of pipes and ducts and also provide economic savings in the construction of multi-storey buildings. This paper deals with the analysis and design of such beams under the loading case of bending and shear.*

Keywords:

1. Introduction

For modern construction, the provision of providing transverse openings in the reinforced concrete beam would be a facility to allow the passage of utility pipes and ducts through the structure. This type of design would provoke and promote the structural designers to lower the height of the structure and to make structure better in design and at economical cost. In case of small buildings the savings would not be significant, but in case of high rise building savings in a single storey multiplied by no. of stories would result in substantial savings in total height, length of electrical wires and ducts, air conditioner pipes,

plumbing material, partition surfaces and load on foundation.

Due to the abrupt change in the cross section of the beam and introduction of opening in the beam the normal beam behaviour would change to a complex one. The opening corners would subject to high stress which would lead to cracking of beams. Also reduction in the stiffness of the beam would lead to excessive deflection under the service load. Thus proper detailing with sufficient amount of special reinforcement is to be provided for such beams to avoid the adverse effects on the strength and serviceability of the beam. Presently no design criteria is mentioned in any of the code which is used for design of concrete building structure.

2. Methodology

An experimental investigation is to be carried of reinforced concrete beam with openings for combined bending and shear. The specimens of reinforced concrete beam with and without openings are to be casted. Casting and testing is been done at the TOM (testing of material) lab of CMTRID LAB, . The values of the peak load and maximum deflection are recorded. Similar specimens are also designed analytically in finite element tool ANSYS and the values of the maximum stress and deflection are obtained. According to these values the appropriate designing of the reinforcement is done in the beams and tested. Methods of analysis are:

- A. Analytical approach using FEM tool ANSYS.
- B. Experimental testing of beams.

3. Experimental work

3.1 Compressive strength of concrete

Cubes of standard size 150x150x150mm size are casted and tested practically for its crushing/compressive strength so as to validate the strength of M25 grade concrete. In total 27 cubes are casted. 9 cubes are casted per day out of which each set of 3 is tested on 3rd, 7th and 28th day respectively. The average values of 3, 7, 28 days is calculated. Average values of the strength obtained of all the cubes are shown in table 1 followed by its graphical representation seen in Fig.1. Fig.2 shows the casted cubes followed by its testing as shown in Fig.3.

Average values of the compressive strength of cubes	
3 days	19.32 N/mm ²
7 days	22.34 N/mm ²
28 days	37.22 N/mm ²

Table 1

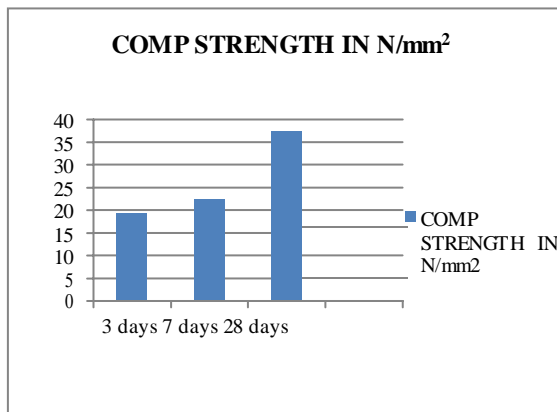


Fig.1 Chart showing the increase in strength with the time of curing.



Fig.2 Casting of cubes



Fig. 3 Testing of Cubes.

3.2 Scaling and Casting of beams

A standard RCC beam of size 230mm x 450mm having length 2.5m is been considered from a residential plan and designed using IS 456. Two different openings sizes of 100mm and 150mm are taken into consideration at different locations along the length of the beam. Fe415 steel and M25 concrete are used. As casting curing and transporting of such beams is difficult, it is scaled down to a size which is easy for practical purpose. Beam is scaled down to a size of 65mm x126mm and having length 700mm. Similarly openings are scaled down to a size of 28mm and 42mm respectively.

Initially 3 beams are casted and tested on the UTM without any reinforcement in it having one, two, three openings respectively on each beam of size 28mm so as to identify the cracking pattern due to which the beam fails. Fig. 4 shows the formwork of the beams and placing of PVC pipes so as to form the required openings.

Fig. 5 shows the casting and testing of the beam with 3 openings. The cracking pattern of the beam can be seen in this figure.



Fig. 4 Formwork prepared on site.



Fig. 5 Casting and testing of beam with three opening.

3.3 Loading condition

The beam is placed over the jaws of the UTM and fixed over it. The centre of the beam is marked and on equal distance from the centre rolled steel sections are placed on each side. Over these rolled steel sections a mild steel plate is placed over which the central point load is applied by the UTM. This procedure is followed so as to apply a two point load as per IS specification of applying a point load. Fig. 6 shows a typical arrangement of the loading condition made.



Fig.6 Typical arrangement of two point loading condition.

4. Conclusion

- The crack pattern which the beam will undergo on the action of practical loading condition or during flexure test is obtained.
- Special reinforcement is to be designed to avoid the inclined cracks undergone by the beam due to the provision of openings in the beam during the test.
- After provision of designed reinforcement the beam is tested practically for flexure test and also models of the same would be designed and tested analytically in ANSYS so as to validate the obtained results.

Acknowledgement

This work is synergetic product of many minds. I am Grateful for the inspiration and wisdom of many thinkers and for the trans-generational sources and the roots. I hereby take this opportunity to express my profound gratitude and deep regards to my guide Dr Bhushan Shinde sir for their exemplary guidance, monitoring and constant encouragement throughout the course of this work.

References

Journal papers

1. *Beams with Openings: and Design* by Mansur, M.A. and Kiang Hwee Tan.
2. Mansur, M.A., Tan, K.H. and Lee, S.L., "A Design Method for Reinforced Concrete Beams with Large Openings", *Journal of the American Concrete Institute, Proceedings, Vol. 82, No. 4, USA, July/August 1985, pp. 517-524.*
3. *Reinforced concrete Beams with small opening in Bending and torsion* by M.A.Mansoor and P.Paramasivam.
4. Some, N.F. and Corley, W.G. (1974). *Circular openings in webs of continuous beams Shear in Reinforced Concrete, special Publication SP-42, American Concrete Institute, Detroit, 359-398.*

Standard Codes

5. IS 456:2000. 'Plain and Reinforced concrete-Code of practice.'
6. IS 10262:2009 'Concrete Mix Proportioning- Guidelines'